


360W SINGLE OUTPUT

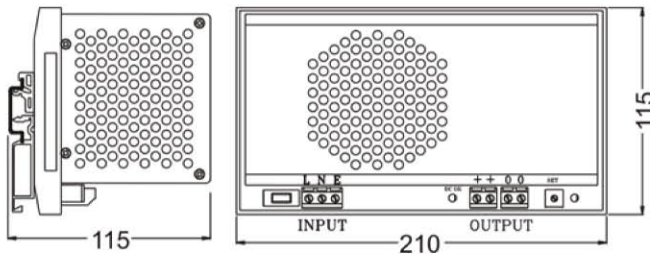

All dimensions in mm

FEATURES	<ul style="list-style-type: none"> • Single Phase Input • Built In Transient protector & EMI filter • Protection against short circuit, overload, overvoltage & Overtemperature (80°C) • Low ripple & noise • Forced Cooling (Internal fan) • Power OK indication, terminations, output set control & rating details on front • 100% full load burn in tested • Low cost • High reliability • Compact 																																									
ISOLATION	Input – Output : 2KVAC, 1 minute Input – Earth : 2KVAC, 1 minute Output – Earth : 0.5KVAC, 1 minute																																									
EFFICIENCY	70 ~ 75%																																									
O/P VOLTAGE ADJUSTMENT	+/- 10% of nominal output voltage																																									
OVERLOAD PROTECTION	105% ~ 130% of rated load																																									
LINE & LOAD REGULATION	Better than 0.5%																																									
HOLD UP TIME	> 20ms at rated input voltage and load																																									
OPERATING AMBIENT	0 ~ 50°C, 95% RH																																									
STORAGE AMBIENT	-20°C to 85°C																																									
SAFETY STANDARD	Design refers to EN60950-1																																									
EMC STANDARD	Design refers to EN55022, EN55024																																									
TERMINATIONS	Screw type, for 2.5mm sq. wire																																									
MOUNTING	35 mm DIN rail																																									
WEIGHT	1400 grams																																									
ORDERING INFORMATION	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th colspan="2" style="text-align: center;">NOMINAL INPUT : 230VAC/DC</th> <th colspan="2" style="text-align: center;">NOMINAL INPUT : 110VAC/DC</th> <th rowspan="7" style="text-align: center;">OUTPUT</th> <th rowspan="7" style="text-align: center;">RIPPLE & NOISE</th> <th rowspan="7" style="text-align: center;">OVERVOLTAGE PROTECTION</th> </tr> <tr> <th style="text-align: center;">INPUT VOLTAGE</th> <th style="text-align: center;">AC</th> <th style="text-align: center;">DC</th> <th style="text-align: center;">AC</th> <th style="text-align: center;">DC</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">INPUT RANGE</td> <td style="text-align: center;">180 ~ 270V</td> <td style="text-align: center;">200 ~ 360V</td> <td style="text-align: center;">90 ~ 130V</td> <td style="text-align: center;">100 ~ 160V</td> </tr> <tr> <td style="text-align: center;">I/P FREQUENCY</td> <td style="text-align: center;">47 ~ 63Hz</td> <td style="text-align: center;">—</td> <td style="text-align: center;">47 ~ 63Hz</td> <td style="text-align: center;">—</td> </tr> <tr> <td style="text-align: center;">I/P CURRENT (max)</td> <td style="text-align: center;">3.5A @230V</td> <td style="text-align: center;">2A @230V</td> <td style="text-align: center;">7A @110V</td> <td style="text-align: center;">4A @110V</td> </tr> <tr> <td style="text-align: center;">INRUSH CURRENT</td> <td style="text-align: center;">32A @230V</td> <td style="text-align: center;">23A @230V</td> <td style="text-align: center;">16A @110V</td> <td style="text-align: center;">11A @110V</td> </tr> <tr> <td style="text-align: center;">ORDER CODE</td> <td colspan="2" style="text-align: center;">G31-360-24</td> <td colspan="2" style="text-align: center;">G32-360-24</td> <td style="text-align: center;">24V : 15A</td> <td style="text-align: center;">< 240mV</td> <td style="text-align: center;">< 30V</td> </tr> </tbody> </table>		NOMINAL INPUT : 230VAC/DC		NOMINAL INPUT : 110VAC/DC		OUTPUT	RIPPLE & NOISE	OVERVOLTAGE PROTECTION	INPUT VOLTAGE	AC	DC	AC	DC	INPUT RANGE	180 ~ 270V	200 ~ 360V	90 ~ 130V	100 ~ 160V	I/P FREQUENCY	47 ~ 63Hz	—	47 ~ 63Hz	—	I/P CURRENT (max)	3.5A @230V	2A @230V	7A @110V	4A @110V	INRUSH CURRENT	32A @230V	23A @230V	16A @110V	11A @110V	ORDER CODE	G31-360-24		G32-360-24		24V : 15A	< 240mV	< 30V
		NOMINAL INPUT : 230VAC/DC		NOMINAL INPUT : 110VAC/DC		OUTPUT				RIPPLE & NOISE	OVERVOLTAGE PROTECTION																															
	INPUT VOLTAGE	AC	DC	AC	DC																																					
	INPUT RANGE	180 ~ 270V	200 ~ 360V	90 ~ 130V	100 ~ 160V																																					
	I/P FREQUENCY	47 ~ 63Hz	—	47 ~ 63Hz	—																																					
	I/P CURRENT (max)	3.5A @230V	2A @230V	7A @110V	4A @110V																																					
	INRUSH CURRENT	32A @230V	23A @230V	16A @110V	11A @110V																																					
ORDER CODE	G31-360-24		G32-360-24		24V : 15A		< 240mV	< 30V																																		

Note : 1. All parameters measured at nominal input, rated load and 25°C of ambient temperature unless otherwise specified.
 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 100uf parallel capacitor.
 3. The power supply is intended to be installed as a component inside the enclosure of final equipment. The final equipment must be re-confirmed that it still meets the EMC directives.
 4. These units are designed for mounting on horizontal DIN rail. Ensure clearance of minimum 35mm from adjacent components for proper ventilation.

